

Research on RDE performance for in-use vehicles especially at high altitude conditions in China

Feng Yan^{1,*}, Haiguang Zhao^{2,3}, and Zhengjun Yang¹

¹ China Automotive Technology & Research Center Co., Ltd., Tianjin 300300, China

² State Environmental Protection Key Laboratory of Vehicle Emission Control and Simulation, Chinese Research Academy of Environmental Sciences, Beijing 100012, China

³ Vehicle Emission Control Center, Chinese Research Academy of Environmental Sciences, Beijing 100012, China

Keywords: RDE, In-use vehicle, High altitude conditions.

Abstract. The real driving emissions (RDE) of an in-use gasoline and an in-use diesel light-duty (LD) vehicle, both are SUV type, are studied based on portable emission measurement system (PEMS). The gasoline vehicle complying with emission standard of China 6 with a mileage of about 50000 km, and the diesel vehicle in this study is complying with emission standard of China 5 with a mileage of about 130000 km for there are hardly any China 6 diesel vehicles in-use in major city. Special attentions are paid on their emission behaviors at high altitude conditions (1300 to 3000 m above sea level). It is observed that the RDE test approach is still feasible for revealing in-use real driving emissions at extremely high altitudes (>1300 m, which is beyond the upper limit of extended altitude conditions according to the Euro 6 regulation). The results reveal that for in-use China 6 gasoline vehicle, the efficient three way catalyst (TWC) is capable of handling NO_x, CO emission sufficiently, accompany with port fuel injection that guarantees the RDE test results (NO_x, PN, CO) fulfill the China 6 emissions standards (which are 35 mg/km, 6E11 #/km and 500 mg/km respectively). And for China 5 in-use diesel vehicle, EGR as the only NO_x control means is not sufficient which brings extremely high real driving NO_x emission, with the maximum value exceeds about 3.7 and 23.2 times of the China 5 and China 6 NO_x emission limits, but on the other hand, the PN emission is only about 1% of the China 6 PN standard value for the usage of DPF.

1 Introduction

The emission limits for cars have been progressively tightened in the past 25 years. Take the emission regulation of light-duty vehicle as an example, the emission limits of HC, CO and NO_x for type I test of Euro 5 standard is only about 50%, 56% and 60% of the

* Corresponding author: yanfeng2015@catarc.ac.cn

limiting values of Euro 3 standard. The corresponding emission limits of Euro 6 (b) standard is 500, 50 and 35 mg/km respectively, which is approximately 40%-50% more stringent than the Euro 5 standard [1].

Despite the severe emission limits, several key pollutants of vehicles, especially NO_x, have failed to deliver real-world improvements of reducing the actual on-road emissions [2]. The emissions for typical driving conditions, especially diesel vehicles, are deliberately left much higher than promised or tested [3], the NO_x emission is approximately 10 times higher in extreme conditions such as air-conditioning or sudden acceleration [4]. Rubino studied the real-world emission behavior of light-duty (LD) vehicles with respect to their emissions on conventional chassis dynamometer by the CO₂ window-based method and revealed that the NO_x concentrations are several times higher during real driving regimes which are far beyond the scope of type approval test cycle [5, 6]. The outclassed NO_x emission of on-road conditions than type approval test consists with the study of Vojtisek-Lom, who cumulated the exhaust emissions of LD diesel vehicles by portable emission measurement system (PEMS), further found that the PM emissions were also considerably higher at full load, especially at low rpm [7]. Weiss conducted a comprehensive on-road emissions test of LD vehicles by using the EMROAD method, which is a CO₂ window - based data processing method developed for extracting and processing the raw data recorded by PEMS [8], and found that the NO_x emissions of gasoline vehicles as well as CO and total hydrocarbon emissions of both diesel and gasoline vehicles generally remain below the respective emission limits, by contrast, NO_x emissions of modern Euro 5 diesel vehicles, exceed emission limits by $320 \pm 90\%$ [9]. Hu used the vehicle specific power (VSP)-bin method, which can normalize the driving conditions in an integrated way that better correlates the instantaneous power demand on the engine per unit vehicle mass with emission rates, to calculate the emission behavior of 16 diesel taxis drove on different roads in Macao with PEMS, and revealed that diesel cars with specific emission control devices (such as EGR + DOC) usually penalize fuel economy, meanwhile with significantly higher NO₂ emissions and NO₂/NO_x ratios than the other diesel cars [10]. Carslaw analyzed the remote sensing data and found that the real NO_x emission have not decreased for the past 15-20 years even for Euro 5 vehicles and the current type approval test is inadequate to ensure the real-world emissions decrease in line with emission limits [11]. Based on the statistic of ADAC, AEC, JRC and TOI, the real-world NO_x emission of diesel passenger cars are 400-500 mg/km (5-6 times of the Euro 5 limit), while the CO, THC, and PM real world test results do not exceed the type approval limits [12].

One reason for the current vehicle emission contradiction is that obsolete tests or cycle beating techniques have been used by carmakers leading to levels of car emission many times higher on the road than in laboratory tests (e.g. the Volkswagen emissions scandal in 2015) [13]. Another reason is that the conditions under which type approvals usually take place are associated only to a limited area of engine operating range, incomparably a smaller operating scope than driving under real-world conditions [14], this will lead the engineer calibrate only for specific inspections other than the whole engine working range. Industry experts believe that the solution for this contradiction is to calibrate the engines based on actual driving emission data, limits the emissions not only during the type approval tests [15], but also over the entire operating range [16, 17].

In 2017, the European Union introduced testing in real-world conditions called Real Driving Emissions (RDE), using PEMS in addition to laboratory tests, with the actual limits use 110% conformity factor (abbreviated as CF, which represents the difference between the laboratory test and real-world conditions, 110% means CF=2.1) in 2017, and 50% (CF=1.5) in 2019 [18]. By referring to European experiences, RDE test is also introduced in China 6 regulation, with some amendments according to big geographical and traffic condition differences between Europe and China, one of the most important changes is that

we further extend the requirements of altitude from 1300 m to 2400 m for the altitude of European countries is generally less than 700 m, while over 1/3 (9 out of 23) provinces of China are above 1500 m altitude.

This paper mainly focused on real driving emissions of in-use vehicles, special attentions are paid on the emission behaviors at high altitude and low temperature environmental conditions.

2 RDE test and apparatus introduction

Generally, the China 6 regulation follows the standard RDE test method of Euro 6 regulation, with some adjustments: 1) the emission of THC, CH₄, NMHC is not included for the calibration gas H₂ is regarded as dangerous cargo which is forbidden to be carried on road in China; 2) there are differences in conformity factor and implementation time between China 6 and Euro 6 regulation, which can be referred to Table 1; 3) considering the apparent data processing difference between power-bin method and chassis dynamometer in-use method, the EMROAD method is recommended in China 6 regulation; 4) the extended altitude is 700~1300 m in Euro 6 regulation, while in China 6 regulation further extended altitude, which is 1300~2400 m, is add by considering the actual geographical conditions in China.

As defined in China 6 legislation, the RDE test should be carried out under the following demands: 1) the test duration should between 5400 and 7200 seconds; 2) the urban, rural and motorway conditions are classified by vehicle speed, which is in the range of < 60 km/h, 60-90 km/h, and > 90 km/h ; 3) the mileage of each condition shall not be less than 16 km, while the total distance performed under urban, rural and motorway conditions should be 34%, 33% and 33% respectively, which allows a deviation of ± 10% but the percentage of urban condition shall not be less than 29%.

Table 1. The difference of conformity factor and implementation time between China 6 and Euro 6 regulation.

Regulation		Conformity Factor (CF)	Implementation time
Euro 6		Submit data only	2016.4.1
		2.1	2017.9.1
		1.5	2019.9.1
China 6	(a)	Submit data only	2020.1.1
	(b)	2.1	2023.1.1

The test apparatus is presented in Figure 1, a portable AVL M.O.V.E system was used for the measurement of exhaust emissions from vehicles, specifically carbon monoxide, carbon dioxide, nitrogen oxides and particle number emissions. The installation status of test apparatus in vehicle for RDE tests is presented in Figure 2.



Fig. 1. The PEMS apparatus.

In terms of bench-marking and quality control, zero-span checks were performed before and after each measurement. Post-processing plausibility checks were made on all data, focusing on CO₂, to ensure that the data collected were realistic.

3 Results and analysis of RDE tests

3.1 Vehicle and test conditions

The purpose of this paper is to verify the real driving emissions of in-use vehicles, especially at high altitude and low temperature environmental conditions, therefore, the RDE tests were carried out in 5 regions with altitude above 1300 m and 1 more 0 m altitude region for comparison. The detailed environmental conditions are shown in Table 2.

Table 2. Environmental conditions of RDE tests.

Altitude (m)	Temperature (°C)
0	15/30
1300	15/30
1900	0/15/20/25/30
2200	0
2400	0/15/20
3000	0

Vehicle 1 is naturally aspirated equipped with a port fuel injection (PFI) 2.7L gasoline engine and a three way catalytic (TWC) converter, vehicle 2 is turbo charged equipped with a 2.0L diesel engine and a diesel particulate filter (DPF). The detailed vehicle parameters can be referred to Table 3.



Fig. 2. Installation statuses of test apparatus in vehicle 1 for RDE tests.

Table 3. Vehicle parameters.

Vehicle	Fuel	Fuel supply	Air supply	After treatment
Vehicle 1	gasoline	PFI	naturally aspirated	TWC
Vehicle 2	diesel	DI	Turbo charged	DPF

3.2 PEMS verification test

According to legislation, the PMES verification tests were carried out first before RDE test on Chassis Dynamometers under WLTC cycle, the PEMS is in series connected to the Chassis Dynamometer test system as shown in Figure 3, and the emission differences between Chassis Dynamometer test and PEMS test are shown in Table 4. As can be seen in Table 4 that the PEMS detected CO₂, CO and NO_x emissions show good agreements with the Chassis Dynamometers test results, all meet the regulation allowable deviations. The PN emissions differ considerably, but the corresponding data is in the same quantity rank and the allowable deviation of PN is not specified by regulation.



Fig. 3. The Installation statuses of PEMS verification test of vehicle 2. PEMS is in series connected to the Chassis Dynamometers system, the test cycle is WLTC cycle.

3.3 The influence of altitudes on real driving emissions

Figure 4 shows the real driving emissions (CO₂, CO, NO_x and PN) of vehicle 1 at different altitudes varying from 0-2400 m with an approximately constant environmental temperature of 15 °C. It is easily speculated that the PN emission should not be a problem as the fuel is port injected which provided a tremendous uniformity mixture state, on the other hand, the CO and NO_x emission can be restrained for the usage of TWC which will very likely results in very low levels of these two gaseous emissions, additionally, as the cold start is excluded in emission statistics according to the regulation, the real driving emissions of vehicle 1 have great possibilities to fulfill the China 6 emission limits even with the conformity factor of 2.1 not counted. It is observed in Figure 4 that there is no obvious regularity of CO emission in real driving conditions as the altitudes varied from 0-2400 m, but all the CO emissions are around 200 mg/km, which below the China 6 limiting value of 500 mg/km, the maximum conformity factor of CO is 0.498, which means there are still 50% allowance of CO emission comparing to the limiting value. Figure 4 also reveals that the NO_x emission showed a downward trend with the increase of altitude as the lower oxygen concentration generally suppress the combustion temperatures, the maximum conformity factor of NO_x is 0.628, implying more than 37% allowance to the NO_x limiting value. The PN emission also showed a downward trend with the increase of altitude, which shows a maximum conformity factor of 0.633 with more than 36% allowance to the China 6 PN limiting value.

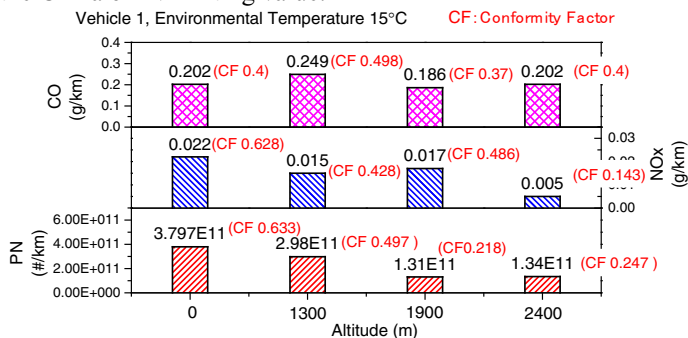


Fig. 4. The real driving emissions of vehicle 1 at different altitudes varying from 0-2400 m with an approximately constant environmental temperature of 15 °C.

Figure 5 shows the real driving emissions of vehicle 2 at 0 °C environmental temperature with different altitudes varying from 1900-3000 m. The results in Figure 5 reveal that for the tested diesel vehicle, the CO, NO_x and PN emission didn't change significantly as the altitude rises from 1900 to 2200 m, after that, it increases tremendously at the altitude of 3000 m, which may due to the deterioration of combustion caused by low oxygen concentration at high altitude regions. All CO emissions meet the China 5 or China 6 regulation (both are 500 mg/km for CI vehicle), with the maximum conformity factor of 0.204 showing nearly 80% allowance to the limiting value. Due to the usage of DPF, the PN emission is quite small, which is approximately two orders of magnitude lower than the China 5 or China 6 PN limiting value (both are 6E11 #/km for CI vehicle). The NO_x emission of vehicle 2 is quite high for EGR as the only NO_x control means is obviously not sufficient in real driving conditions. the extremely high real driving NO_x emission of vehicle 2 exceeds about 4-4.5 times and 19-21 times refer to the 180 mg/km of China 5 and 35 mg/km of China 6 emission limit respectively. Figure 5 shows that the RDE test method is an effective mean revealing the actual emission behavior in real world not only in type approval conditions but also in extreme altitude conditions in China.

Table 4. The WLTC emission differences between Chassis Dynamometer test and PEMS test.

Vehicle #	Means of WLTC emission measurement	CO ₂ emission factor (g/km)	CO emission factor (g/km)	NO _x emission factor (g/km)	PN emission factor (#/km)
Vehicle 1	Chassis Dynamometer Test	272.421	0.76	0.0145	3.09E+11
	PEMS Test	273.899	0.71	0.0141	8.10E+11
	Deviation	0.54%	6.58%	2.76%	61.85%
Vehicle 2	Chassis Dynamometer Test	180.92	0.026	0.384	2.19E+09
	PEMS Test	190.14	0.027	0.375	6.18E+09
	Deviation	5.09%	3.84%	2.34%	64.56%
Regulation allowable deviation		±10g/km or 10%	±15mg/km or 15%	±15mg/km or 15%	--

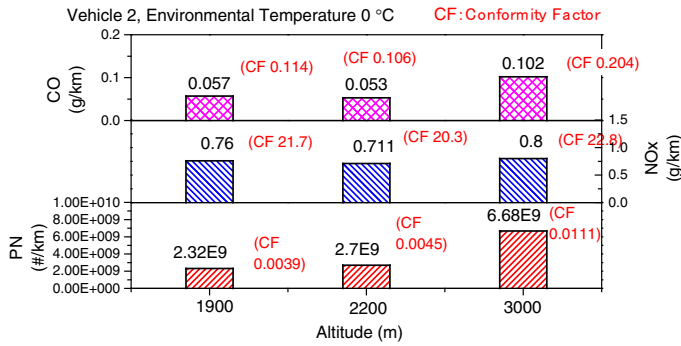


Fig. 5. The real driving emissions of vehicle 2 at different altitudes varying from 1900-3000 m with an approximately constant environmental temperature of 0 °C.

3.4 The influence of environmental temperatures on real driving emissions

Figure 6 shows the real driving emissions of vehicle 1 at different environmental temperatures varying from 0-30 °C with a constant altitude of 1900 m. It is observed in Figure 6 that there is no obvious regularity of CO, NO_x and PN emission in real driving conditions as the temperature varied from 0-30 °C. All the emissions are below the China 6 limiting values, the maximum conformity factor of CO, NO_x and PN emission are 0.372, 0.486 and 0.218 respectively.

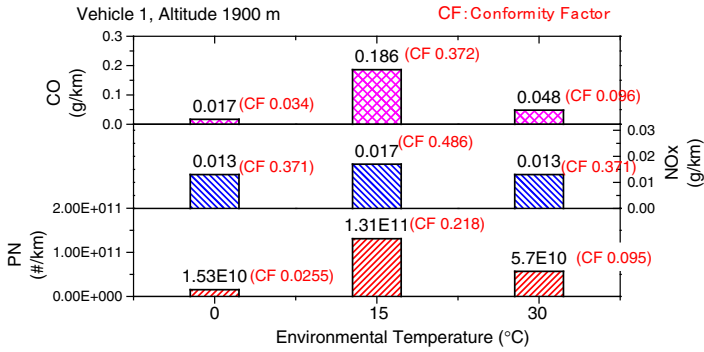


Fig. 6. The real driving emissions of vehicle 1 at different environmental temperatures varying from 0-30 °C with a constant altitude of 1900 m.

Figure 7 shows the real driving emissions of vehicle 2 at 1900 m altitude with different environmental temperatures varying from 0-30 °C. The results in Figure 7 reveal that for the tested diesel vehicle, the CO, NOx and PN emission increases first as the temperature rises from 0 to 15 °C, after that, the change of emissions are not obvious. The CO and PN emissions are below the China 5 or China 6 limiting values, the maximum conformity factor are 0.146 and 0.0086 respectively. The insufficient of EGR in controlling of NOx emission brings extremely high real driving NOx emission, with the maximum value exceeds about 4.6 and 23.2 times of the China 5 and China 6 NOx emission limits.

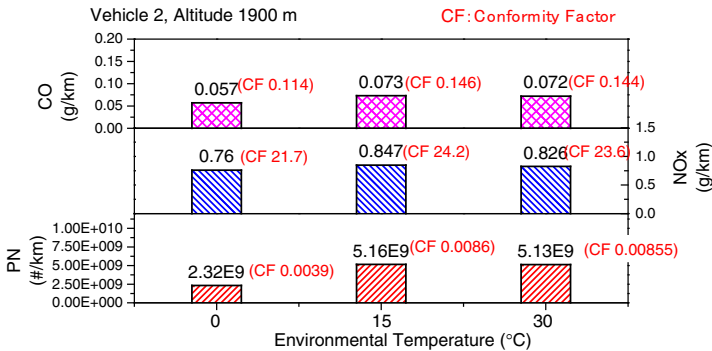


Fig. 7. The real driving emissions of vehicle 2 at different environmental temperatures varying from 0-30 °C with a constant altitude of 1900 m.

3.5 The influence of cold and hot starts on real driving emissions

Figure 8 shows the EMROAD calculated emission differences between two RDE tests of vehicle 1 at 1900 m altitude and 25 °C environmental temperature, one with cold start and the other with hot start. The results in Figure 8 reveal that as the cold start is excluded in emission statistics according to the regulation, the EMROAD calculated emission differences between cold start and hot start are quite small, the hot start test has almost the same CO emissions and 23% lower NOx and PN emissions comparing to the cold start test.

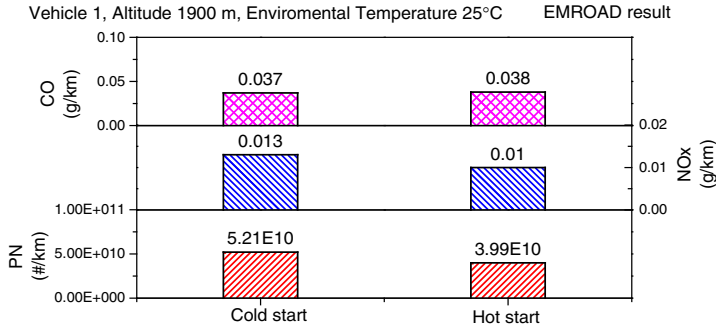


Fig. 8. The EMROAD calculated emission differences between cold start and hot start RDE tests of vehicle 1 at 1900 m altitude and 25 °C environmental temperatures.

As the engine cold start is one of the most significant pollutant emission procedures, the integral vehicle emissions should be quite different between cold and hot start RDE tests other than the EMROAD method has presented. Figure 9 revealed the transient emission of CO, NOx and PN during a cold start RDE test of vehicle 1 at 1900 m altitude and 25 °C environmental temperature. It is shown in Figure 9 that apparent peaks of CO, NOx and PN emission can be observed at cold start period while the engine coolant temperature is below 70 °C, the peaks of emissions generated is many times higher than their corresponding emissions occurred during urban, rural and motorway driving conditions, and the integral CO, NOx and PN emissions of cold start period account for more than 90%, 25% and 65% respectively of the corresponding total emissions during the whole RDE test. Figure 10 shows the integral emission differences between two RDE tests of vehicle 1 at 1900 m altitude and 25 °C environmental temperature, one with cold start and the other with hot start. The results in Figure 10 reveal that there exist great differences in integral vehicle emissions between cold and hot start, and the cold start test emits 68.4% more CO, 38.4% more NOx and 75% more PN than the hot start test.

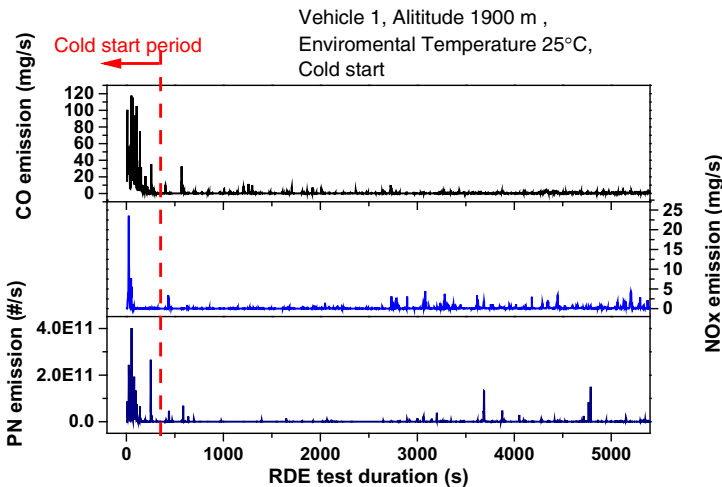


Fig. 9. The transient emission of CO, NOx and PN during a RDE test of vehicle 1 at 1900 m altitude and 25 °C environmental temperature.

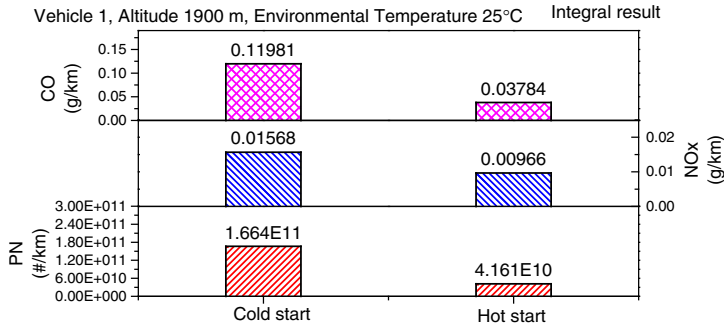


Fig. 10. The integral emission differences between cold start and hot start RDE tests of vehicle 1 at 1900 m altitude and 25 °C environmental temperature.

The main purpose of introducing RDE tests is to detect the vehicle emission level in real driving conditions, promoting technological innovation to control the air pollution emissions of cars, vans and trucks. As the cold start is indispensable in normal vehicle usage and as shown in Figure 9 that great amount of pollutants were generated in cold start stage resulting in significant differences between hot and cold start integral emissions, in order to reflect the true level of emissions better, the RDE test should consider adding cold start emissions at an appropriate time in the future.

3.6 The repeatability of RDE tests

Three repetitive RDE tests were implemented on vehicle 1 under the same altitude of 1900 m, the same environmental temperature of 15 °C and the same test route, and the emission differences are shown in Figure 11. It is revealed in Figure 11 that the RDE tests have poor repeatability and there exist huge differences in emissions between each individual test. Table 5 gathered the statistics of the repetitive RDE test results' deviation with the average value, showing that the maximum deviation of CO, NOx and PN emission to their counterpart average values could be 99.5%, 84.5% and 57.6% respectively. This means that even though the test conditions and routes are carefully controlled, the RDE test results are still lack of repeatability for they are likely affected by driving habits, road conditions, climate conditions and other factors.

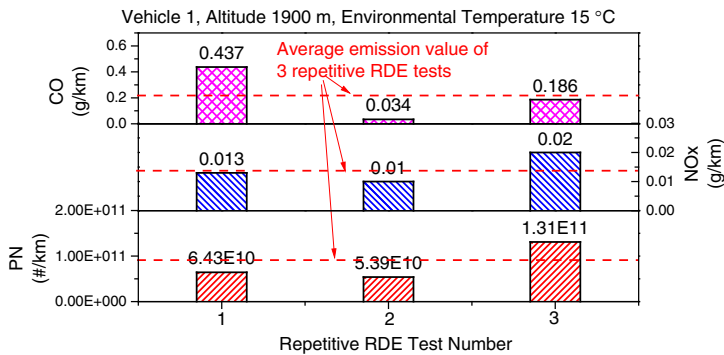


Fig. 11. The emission differences between 3 repetitive RDE tests of vehicle 1 under the same altitude of 1900 m, the same environmental temperature of 15 °C, and the same test route.

Table 5. The deviation of repetitive RDE test results with the average value.

Test Number	Emission deviation with the average value %		
	CO	NOx	PN
1	+ 99.5	- 9.1	- 22.6
2	- 84.5	- 30.1	- 35.1
3	- 15.1	+ 39.9	+ 57.6

3.7 Conformity Factor statistics of RDE tests at different altitudes and environmental temperatures

The statistics of the Conformity Factor of RDE tests at different altitudes and environmental temperatures are shown in Table 6, which reveals that the PN emissions of both vehicle 1 and vehicle 2 are under China 5 or China 6 limit values, with quite large margins are still preserved. The maximum CF of PN emission of vehicle 1 and vehicle 2 are 0.478 and 0.47 respectively, both have more than 50% allowance to the PN limiting value.

The NOx emissions of vehicle 1 fulfill the China 6 emissions standards with the maximum CF of 0.86, while for vehicle 2, as EGR is the only NOx control means, which is obviously not sufficient that brings extremely high real driving NOx emission, with the CF varies from 3.5 to 4.7 and from 18.2 to 24.2 for China 5 and China 6 limits respectively, meaning that the maximum NOx emission exceeds about and 3.7 and 23.2 times of the China5 and China 6 emission limits.

4 Conclusions

This paper mainly focused on the real on-road emissions behaviors of in-use gasoline and diesel vehicles, especially at high altitude conditions. It is observed that the RDE test approach is still feasible for revealing in-use real driving emissions at extreme conditions, and the following conclusions were obtained:

- 1) The RDE test method can still be used as an important means to detect the actual vehicle emission in the further extended altitude conditions in China, which can support the manufactories developing more environment-friendly vehicles.
- 2) For China 6 port fuel injection gasoline LD vehicle, the efficient TWC is capable of handling NOx, CO emission sufficiently, which guarantees the RDE test results fulfill the China 6 emissions standards.
- 3) For China 5 in-use diesel vehicle, EGR as the only NOx control means is not sufficient which brings extremely high real driving NOx emission, with the maximum value exceeds about 3.7 and 23.2 times of the China 5 and China 6 NOx emission limits, but on the other hand, the PN emission is only about 1% of the China 6 PN standard value for the usage of DPF.

This work is supported by the special item of atmosphere of the National key research and development plan, project of “Integrated technologies of particulate matter capture and clean emission for gasoline vehicles” , project number: 2017YFC0211004, 2017YFC0211005

Table 6. The Conformity Factor of RDE tests at different altitudes and environmental temperatures.

Vehicle	Altitude (m)	Temperature (°C)	CF (Conformity Factor)		
			CO	NOx	PN
Vehicle 1	0	15	0.40	0.57	0.633

	1300	30	0.16	0.86	0.298
		15	0.50	0.29	0.500
		30	0.50	0.57	0.141
	1900	0	0.04	0.29	0.030
		15	0.38	0.57	0.218
		20	0.88	0.29	0.107
		25	0.10	0.29	0.095
	2400	30	0.12	0.57	0.045
		0	0.2	0.57	0.120
		20	0.66	0.57	0.478
3000	0	0.22	0.29	0.130	
Vehicle 2	1300	15	0.08	22.28	0.006
		30	0.18	21.42	0.005
	1900	0	0.12	21.71	0.004
		15	0.14	24.28	0.009
		25	0.14	23.71	0.009
	2400	15	0.4	24.28	0.001
	3000	0	0.2	22.85	0.011

Abbreviations

RDE	Real driving emission.
LD	Light duty.
PEMS	Portable emission measurement system.
PFI	Port fuel injection.
TWC	Three way catalyst.
VSP	Vehicle specific power.
CF	Conformity factor.
DPF	Diesel particulate filter.
WLTC	Worldwide Harmonized Light Vehicles Test Cycle.
EGR	Exhaust Gas Recirculation.
DI	Direct injection.

Reference

1. Proposal for a new global technical regulation on the Worldwide harmonized Light vehicles Test Procedure (WLTP), Economic Commission for Europe Inland Transport Committee, World Forum for Harmonization of Vehicle Regulations, 162nd session, Geneva, 11-14 March 2014.
2. François Cuenot, Realistic real-world driving emissions tests: a last chance for diesel cars? <http://www.transportenvironment.org/publications/realistic-real-world-driving-emissions-tests-last-chance-diesel-cars>.
3. Martin Weiss, Pierre Bonnel, et al, Will Euro 6 reduce the NOx emissions of new diesel cars? – Insights from on-road tests with Portable Emissions Measurement Systems (PEMS), Atmospheric Environment 62 (2012) 657-665.
4. Myungdo Eom, Junhong Park and Doo-Sung Baik, Study on Real Driving Emission for Light-duty Vehicle, Advanced Science and Technology Letters Vol.90 (Mechanical Engineering 2015), pp.10-13.
5. Rubino, L., Bonnel, P., Hummel, R., Krasenbrink, A., Manfredi, U., De Santi, G., Perotti, M., Bomba, G., 2007. PEMS light-duty vehicles application: Experiences in downtown Milan. SAE 2007-24-0113.
6. Rubino, L., Bonnel, P., Hummel, R., Krasenbrink, A., Manfredi, U., de Santi, G., 2009. On-road emissions and fuel economy of light duty vehicles using PEMS: chase-testing experiment. SAE International Journal of Fuels and Lubricants, 1454-1468.

7. Vojtisek-Lom, M., Fenkl, M., Dufek, M., Mareš, J., 2009. Off-cycle, real-world emissions of modern light duty diesel vehicles. SAE 2009-24-0148.
8. Kubelt, J.; Bonnel, P. Portable emission measurements (PEMS) - Data evaluation and post-processing manual for the data evaluation software EMROAD - Version 4.00. EUR Draft report; EC-JRC: Ispra, Italy, 2007.
9. Weiss, M., Bonnel, P., Hummel, R., Provenza, A., Manfredi, U. On-road emissions of light-duty vehicles in Europe. *Environmental Science & Technology* 45 (2011), 8575-8581.
10. Hu, J., Wu, Y., Wang, Z., Li, Z., Zhou, Y., Wang, H., Bao, X., Hao, J., 2012. Real-world fuel efficiency and exhaust emissions of light-duty diesel vehicles and their correlation with road conditions. *Journal of Environmental Sciences* 24, 865-874.
11. Carslaw, D., Beevers, S., Westmoreland, E., Williams, M., Tate, J., Murrells, T., Stedman, J., Li, Y., Grice, S., Kent, A., Tsagatakis, I., 2011. Trends in NO_x and NO₂ emissions and ambient measurements in the UK. In: Version: 3rd March 2011. Draft for Comment. Leeds University, UK.
12. Norbert Lightrink, Gerrit Kadijk, et al, Investigations and real world emission performance of euro 6 light-duty vehicles, TNO report, TNO 2013 R11891, 5 December 2013.
13. Ewing, Jack; Davenport, Coral (2015-09-20). "Volkswagen to Stop Sales of Diesel Cars Involved in Recall". *The New York Times*. Retrieved 2015-09-21.
14. Jerzy Merkisz and Jacek Pielecha, Analysis of Emission Factors in RDE Tests as Well as in NEDC and WLTC Chassis Dynamometer Tests, SAE 2016-01-0980.
15. Pielecha, J., Merkisz, J., Jasiński, R., and Gis, W., "Real Driving Emissions Testing of Vehicles Powered by Compressed Natural Gas," SAE Technical Paper 2015-01-2022, 2015, doi:10.4271/2015-01-2022.
16. Merkisz, J., Pielecha, J. and Molik, P., "The Proposal of RDE Test for Passenger Cars with Hybrid Drive," *Combustion Engines*, PTNSS-2015-3354, 3 (162), 2015, 369-375, ISSN 0138-0346.
17. Merkisz, J., Pielecha, J. and Radzimirski, S., "New Trends in Emission Control in the European Union," *Springer Tracts on Transportation and Traffic*, Vol. 1, 2014, p. 170, doi:10.1007/978-3-319-02705-0.
18. "European Commission welcomes Member States' agreement on robust testing of air pollution emissions by cars" (Press release). European Commission. 2015-10-28. Retrieved 2015-10-30.