

# Utilizing CO<sub>2</sub> from refinery for methanol and electricity co-production: system assessment

Qian Ma<sup>1,\*</sup>, Xiaodan Yu<sup>1</sup>, Song Xia<sup>2</sup>, Xu Zhang<sup>1</sup>, Anqi Liu<sup>1</sup>, Bo Yuan<sup>1</sup>, Xiaojun Chen<sup>3</sup>

<sup>1</sup> Research Institute of Safety & Environment Technology, China National Petroleum Corporation, Beijing 102206, China

<sup>2</sup> Daqing Oilfield water supply Company, Daqing 163000, China

<sup>3</sup> Chinese Academy of Environmental Planning, Beijing 100012, China

**Abstract.** As one of the major energy-consuming and high-emission industries, the refineries account for 10% of global industrial carbon emissions, of which about 25% is emitted by fluid catalytic cracking (FCC) process. Therefore, CO<sub>2</sub> capture from FCC flue gas create the possibility for low-carbon refineries. We developed a novel CO<sub>2</sub> utilization process to methanol production modeling using Aspen Plus. Meanwhile, organic Rankine Cycle (ORC) power generation technology was coupled to recover the waste heat of the system. A five-million-ton FCC unit in China was selected as a case study. We conducted some analysis for the process, the results show that the developed system boosts the energy efficiency of the FCC unit by 2.8%. The annual capacity of the waste heat power generation unit is 4.8 GWh, with a thermal efficiency of 5.9%.

## 1. Introduction

Globally, annual carbon dioxide (CO<sub>2</sub>) emissions have increased sharply during past few decades. The increasing greenhouse gas emissions exacerbate climate change and leads to various extreme weather events [1]. Thus, the consensus on CO<sub>2</sub> reduction has prompted most countries to make commitments and put them into action. China also put forward the strategic goal of achieving carbon peak by 2030 and carbon neutrality by 2060 in 2020.

The chemical industry is one of the industries with high energy consumption and high emissions. Refineries, as a major contributor to the chemical industry, occupy 10% of the global industrial carbon emissions [2]. Although the energy structure is gradually transforming, driven by the rapid economic development, the carbon emissions caused by energy use are still rising, increasing by about 7% by 2040 [3]. In the face of “double carbon target”, refineries must assume corresponding responsibility to contribute to China’s transition toward a lower carbon future. Many refineries’ units emit CO<sub>2</sub>. Given the FCC process has a high CO<sub>2</sub> emissions, accounting for 20-35% of the total carbon emissions of the refinery [4]. Therefore, capturing CO<sub>2</sub> from FCC flue gas will be an important step to reduce the total CO<sub>2</sub> emissions of refineries. Meanwhile, the dry gas of refinery is rich in hydrogen, methane, nitrogen, ethylene, ethane, etc., and the production of dry gas in FCC is the largest [5-6]. But at present, the dry gas in domestic refineries is not well used that used as fuel gas or torch. Therefore, the utilization of dry gas in refinery promises an optimistic outlook for decarbonization.

In this study, we designed a methanol production system that uses the CO<sub>2</sub> recovered from the flue gas of FCC unit and the CH<sub>4</sub> and H<sub>2</sub> separated from dry gas as feedstock.

A 5-million-tons FCC unit in China was selected for case study. Fig.1 shows the conceptual design of the hybrid system, including carbon capture, methane dry reforming, methanol synthesis, methanol distillation, and ORC units. To be specific, the CO<sub>2</sub> in the FCC flue gas was captured by carbon capture unit using monoethanolamine (MEA), followed by syngas generation. Then the reaction of syngas with hydrogen via methanol synthesis unit to produce crude methanol, which sent to distillation unit to purify. After the optimization of HEN, the low-grade waste heat derived from methanol distillation unit was utilized by ORC unit for electricity generation.

Methanol, as a chemical intermediate, has attracted much attention. China is the world’s largest producer and consumer of methanol. Based on the essential situation, the domestic methanol production is mainly from coal-to-methanol, which is characterized of high energy consumption and high carbon emission intensity [7]. It is not conducive to the low-carbon development of China’s economy. Natural gas is the most ideal raw material for methanol synthesis. However, at the restrictions of region, it doesn't work in China based on the current energy structure that rich in coal, insufficient oil and limited natural gas supply.

Meanwhile, the generated low-grade waste heat was also recovered and utilized by coupling with Organic Rankine Cycle (ORC) power generation technology. The ORC is a state-of-the-art technology that combines the main process system with power generation system [8]. Although energy use has been optimized under the heat exchanger network, some low-grade heat has still not been well utilized. Thus, we deployed ORC system to recover the waste heat from the methanol distillation unit, converting the low-grade waste heat into electricity.

\* Corresponding author: ma-qian@cnpc.com.cn

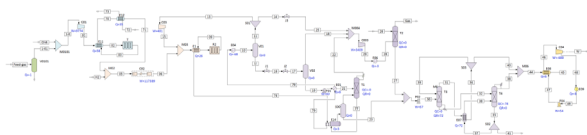


Fig.1. Aspen model diagram of the FCC co-production

## 2. Methodology

### 2.1 Overall energy efficiency calculation

According to the First Law of Thermodynamics, the overall energy efficiency of the methanol production system is calculated as Eq 1.

$$\eta = \frac{\sum E_o}{\sum E_i} \times 100\% \quad (1)$$

where,  $\eta$  denotes the energy efficiency of the methanol production system,  $E_o$  denotes the energy output of the system, and  $E_i$  denotes all the input energy of the system.

### 2.2 Sustainability evaluation

The pros and cons of the new process system are affected by various factors. In order to evaluate the new process more comprehensively, we assessed the sustainability of the CTM from a multi-dimensional perspective. In general, the four main aspects of technology, environment, economy and society contained 12 sub-indicators are considered respectively. To evaluate and compare sustainability of different alternatives more reasonably and scientifically, a further processing of these indicators is adopted by use of normalization method, according to eq. (12). In addition, the setting of some sub-indicators such as technical maturity refers to a previous study of Huang[9].

$$x_{ij} = \frac{x_{ij} - \text{worst}(x_i)}{\text{best}(x_i) - \text{worst}(x_i)} \quad (2)$$

where  $x_{ij}$  is the indicator  $j$  for process  $i$ ;  $\text{best}(x_j)$  is the assumed best case of indicator  $j$ ;  $\text{worst}(x_j)$  is the assumed worst case of indicator  $j$ ;  $x_{ij}$ , which varies in the range  $[0,1]$ , is the normalized indicator  $j$  for process  $i$ .

## 3. Results and discussion

### 3.1 Energy efficiency of the CO<sub>2</sub>-dry gas to methanol production system

Based on the Aspen simulation tool and theoretical calculations, the input and output energy of the CO<sub>2</sub>-dry gas to methanol production system are summarized in Table 1. It can be seen that the system's energy input mainly derives from the feedstock, fuel gas, and electricity, with a total energy input of 36815 TJ, while the total energy output was estimated to be 28958 TJ. According to Eq (1), the overall energy efficiency of the CO<sub>2</sub>-dry gas to methanol production system was 78.6%.

Table 1 Input and output energy of the "CO<sub>2</sub>-dry gas" methanol production system

Input		Export	
Material	Energy (TJ)	Material	Energy (TJ)
methane	18900	Methanol	28933
H <sub>2</sub>	14.8	3.5Mpa Steam	7.47
Fule gas	10400	Electricity	17.3
Electricity	7500		
Sum	36815		28958
Overall energy efficiency			78.6%

Fig. 2 compares the energy efficiency of the FCC process, the CO<sub>2</sub>-dry gas to methanol production process (CTM), and the FCC combined with the CO<sub>2</sub>-dry gas to methanol process (FCC+ CTM). As for the FCC unit, its energy efficiency is relatively lower than CTM process (78.6%), which is only 57.9%. With the co-production of the process, the energy efficiency of FCC increased from 57.9% to 60.7%, prompting a 2.8% energy efficiency improvement. It can be seen that through carbon recovery and recycling can effectively improve the energy utilization efficiency of the original FCC unit.

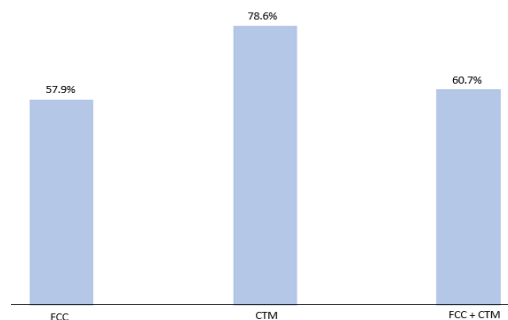


Fig. 2 Energy efficiency comparison of process integration


### 3.2 Electricity generation analysis based on ORC

There is a large quantity of low-grade heat in the methanol production system, and this waste heat is difficult to use for heat exchange. However, the ORC process enables efficient utilization of these energies for electricity generation. Waste heat mainly derives from the cooling process of the methanol product. Considering the impacts of the working fluid temperature and expansion ratio on the ORC process, we selected R290 as the working fluid for ORC power generation. For the designed system with an annual production capacity of 1.45 million tons of methanol, the net output power was 4798 MW, and the annual power generation capacity was 4.798M kWh. The thermal efficiency of the ORC unit was calculated to be 5.9%.

### 3.3 Sustainability analysis

To evaluate the CTM process more conveniently and intuitively, sustainability evaluation was developed that enable to identified advantages and drawbacks of new

process compared with original unit (FCC) and traditional technology. The specific setting values of different indicators are listed in Table 2 and the results (Fig.7) show that CTM brings more environmental benefits in comparison to FCC and traditional process. However, it also has some weak points, such as low energy security. Besides, the technology is still immature and needs further study and improvement. In short, because of its good carbon utilization and high internal recovery rate, and it also shows outstanding advantages in energy efficiency. Therefore, It is a step closer to the realization of urban low-carbon refineries.

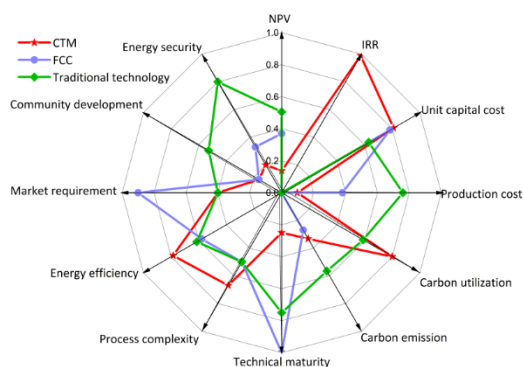

**Fig.3** Sustainability comparison of CTM, FCC and Traditional

**Table 2** Comparison of Indicators for CTM, FCC and Traditional technology

Indicator (subindicator)	CTM	FC [12,13]	Traditional technology [10,11,16]	Reference value	
				Best	Worst
<b>Economic</b>					
NPV (RMB/B Yuan)	12.74	17.33	20.1	30	10 <sup>[14]</sup>
IRR (%)	22.6	14.9	17.15	22.65	17.15 <sup>[11]</sup>
Unit capital cost (RMB/M Yuan)	17.16	17.8	21.76	12.4	37.4 <sup>[11]</sup>
Production cost (RMB/Yuan)	1690	1511	1323	1204	1700 <sup>[11]</sup>
<b>Technical</b>					
Technical maturity	0.250	1.00	0.750	1	0 <sup>[14]</sup>
Process complexity (%)	20	40	40	30	50 <sup>[11]</sup>
Energy efficiency (%)	0.787	0.507	0.614	100	0 <sup>[14]</sup>
<b>Environmental</b>					
Carbon utilization	0.75	0.00	0.55	0.93	0 <sup>[14]</sup>

(t/production)					
Carbon emission (t/production)	0.333	0.27	0.566	0	2.99 <sup>[14]</sup>
<b>Social</b>					
Market requirement (%)	40	90	40	100	0 <sup>[11]</sup>
Community development (staff/100t)	5	5	16	30.3	0 <sup>[15]</sup>
Energy security (%)	20	33	8	100	0 <sup>[15]</sup>

### 4. Conclusion

Implementation of the new process, not only can energy efficiency of original FCC unit be improved, but the GHG can also be utilized. In other words, it has obvious net carbon emission reduction potential for refinery. The energy efficiency analysis showed that the energy efficiencies of the original FCC process, the CO<sub>2</sub>-dry gas methanol production process in the basic case, and the integrated FCC process with the CO<sub>2</sub>-dry gas methanol production process were 57.9%, 78.6% and 60.7%, respectively, illustrating a 2.8% energy efficiency improvement, which was attributed to the process integration. Moreover, reuse or make full use of methane in dry gas is a new thinking of promote production while reducing emissions, which CH<sub>4</sub> and CO<sub>2</sub> are the main GHG. The design ingeniously saves raw materials and turn “waste” into a benefit. Also, it is necessary to apply the new system in other carbon capture and utilization industries that can achieve a beneficial effect on GHG abatement for future sustainable energy systems.

To completely understand the sustainable performance of the CO<sub>2</sub>-dry gas to methanol production system, other environmental footprints (such as the water and environmental footprints) should be further quantified, which are directions for future studies.

### Acknowledgments

This work was supported by National Key R&D Program of China No. 2022YFC3702900. Thanks are also due the China National Petroleum Corporation (CNPC) Research Institute of Safety & Environment Technology for access to the database.

### References

1. Frame D J, Wehner M F, Noy I, et al. The economic costs of Hurricane Harvey attributable to climate change [J]. Climatic Change, 2020, 160(2): 271-281.

2. Xiaobing Zhang, Jing Xu. Optimal policies for climate change: A joint consideration of CO<sub>2</sub> and methane. *Applied Energy* 2018; 211: 1021–1029
3. BP. BP Energy Outlook 2021 edition; 2021; <https://www.bp.com>. [accessed 06 June 2021]
4. Biswas J, Maxwell I E. Recent process-and catalyst-related developments in fluid catalytic cracking. *Applied Catalysis* 1990; 63(1): 197-258.
5. Güleç F, Meredith W, Sun C G, et al. A novel approach to CO<sub>2</sub> capture in fluid catalytic cracking—chemical looping combustion. *Fuel* 2019; 244: 140-150.
6. Wei M, Qian F, Du W, et al. Study on the integration of fluid catalytic cracking unit in refinery with solvent-based carbon capture through process simulation. *Fuel*, 2018;219: 364-374
7. Li S H, Sun X J, Liu L L, Du J. A full process optimization of methanol production integrated with co-generation based on the co-gasification of biomass and coal. *Energy* 2023;267:126566
8. Cao Y, Mihardjo L W W, Dahari M, et al. Waste heat from a biomass fueled gas turbine for power generation via an ORC or compressor inlet cooling via an absorption refrigeration cycle: A thermoeconomic comparison[J]. *Applied Thermal Engineering*, 2021, 182: 116117.
9. Huang, Y, Yi, Q, Wei GQ et al. Energy use, greenhouse gases emission and cost effectiveness of an integrated high- and low-temperature Fischer-Tropsch synthesis plant from a lifecycle viewpoint. *Applied Energy* 2018; 228:1009-1019.
10. Zhou H, Yang S, Xiao H, et al. Modeling and techno-economic analysis of shale-to-liquid and coal-to-liquid fuels processes. *Energy* 2016; 109: 201-210.
11. Yu Han. Construction and comprehensive evaluation of industrial chain for carbon emission and utilization of coal to olefin; China University of Petroleum (Beijing); 2018. (in Chinese)
12. Delin Kong. Contrast of Processing Programmes of C<sub>4</sub> Fractions from Fluid Catalytic Cracking Unit. *Contemporary Chemical Industry* 2003; 2: 103-105. (in Chinese)
13. Qianqian Song. The construction of carbon industrial chain of refineries and low-carbon refineries in China; China University of Petroleum (Beijing); 2014. (in Chinese)
14. Omar Y. Abdelaziza, Wafaa M. Hosny, Mamdouh A. Gadallac, et al. Novel process technologies for conversion of carbon dioxide from industrial flue gas streams into methanol. *Journal of CO<sub>2</sub> Utilization* 2017; 21: 52–63.
15. Siyu Yang, Li Xiao, Andrzej Kraslawski, et al. Sustainability Assessment of the Coal/Biomass to Fischer–Tropsch Fuel Processes. *ACS Sustain.Chem.Eng.* 2014; 2: 80–87.
16. Qin Z, Zhai G, Wu X, et al. Carbon footprint evaluation of coal-to-methanol chain with the hierarchical attribution management and life cycle assessment. *Energy conversion and management* 2016; 124: 168-17.